

## OVERVIEW

The 5580 Smart Signal Conditioner and the SW5580 Dual Channel Configurable Switch are basically the same product, the difference is the SW5580 has options for relay contacts. The 5580 and SW5580 are a next generation DIN rail mounted Smart Vibration Signal Conditioner and Switch that comes in a single channel or dual channel enabled configuration. They have been designed to accept signals from machine casing mounted velocity sensors, accelerometers or shaft observing proximity probe systems and produce a 4-20 mA output proportional to the measured variable as well as the raw signal. It provides the user with a configurable signal input type for one or two independent channels. For each channel, a green LED indicates sensor and cable integrity. In the event of sensor failure, the LED changes to red and the output current is driven below 3.6 mA, thereby signaling a malfunction. The alarm status is indicated by the LED flashing yellow for Alert and flashing red for Danger. A BNC connector gives access to the raw input signal prior to any filtering for local analysis. A built-in 4-line alpha-numeric LCD display is used to display both dynamic input and 4-20 mA output signals. Isolation is provided between input, outputs and supply. In the SW5580 version each channel comes with two optional relays, either solid state or dry contacts, that can be configured for alarm level and time delay.

Designed for ease of use, the mini-USB interface is fitted for quick and easy configuration. Just connect a standard USB to mini-USB cable (maximum 5 meter) between the 5580 or SW5580 and your PC. Using our free configuration software, you can configure the device in the field to meet your application requirements. Use as a single or optional dual channel device. The second channel can be enabled in the field for a fee. Dual Path (i.e. single sensor with two signal conditioning outputs) or Dual Channel (i.e. two sensors with one signal conditioning output each) modes are allowed.

## FEATURES

- Two channel module, one or two channels enabled
- Field configurable full-scale range, input type and High, Low and Band Pass Filters
- Reduced cost alternative to rack mounted monitors
- Provides sensor excitation
- Drives dynamic signals over long distances (300 m or 1000 ft)
- Interfaces an accelerometer, velocity sensor, or proximity probe system to a PLC, DCS or other 4-20 mA input monitor



## FEATURES CONTINUED

- Provides 4-20 mA proportional output
- Alpha-numeric LCD display for both dynamic input and 4-20 mA output signals
- Dual Path or Dual Channel modes are allowed
- LED for Ok/Not Ok and alarm levels
- BNC connector for waveform analyzers
- For the SW5580 optional solid state or dry contact relays are available
- Relay level and time delay are configurable, default is half and three quarter scale, time delay is 3 seconds

## APPLICATIONS

- Centrifugal Compressors
- Motors & Generators
- Process Pumps
- Centrifuges
- Natural Gas/Diesel Engines
- Gas Turbines
- Other Rotating/Reciprocating Machines


## SOFTWARE

- Change configuration software is only required if you want to change the as ordered configuration.
- Download free configuration software from Metrix website.


# 5580 Smart Signal Conditioner & SW5580 Dual Channel Configurable Switch

Datasheet



## TYPICAL INSTALLATION DIAGRAM

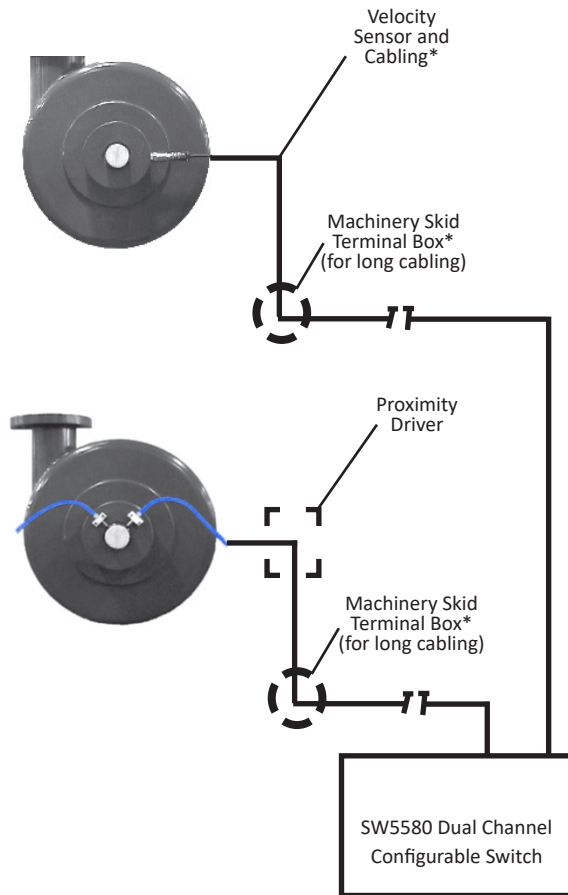

## WEIGHT & DIMENSIONS



**Weight:** 0.8 lbs (0.36 kg)  
**Maximum Power:** 3.2W (5580), 4.0W (SW5580)  
**Recommended Wire Gauge:** 0.8 mm<sup>2</sup> (18 AWG), Allowed: 0.2 to 1.3 mm<sup>2</sup> (16 to 24 AWG)  
**Relay Wiring:** Solid State Relays - Allowed: 0.2 to 1.3 mm<sup>2</sup> (16 to 24 AWG), Electromechanical Relays - Allowed: 1.3mm<sup>2</sup> (16 AWG)  
**Mounting:** 35mm DIN rail mounting  
**Casing Material:** ABS PA765 Durable Plastic

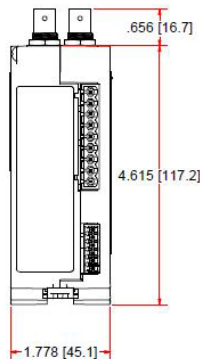

## SPECIFICATIONS

<b>Input signal</b>	100 to 500 mV/ips, 10 to 100 mV/g, 100-200 mV/mil
<b>Sensor Excitation Provided</b>	Required only for piezo-velocity sensor input types: 24 VDC, 4 mA constant current standard.
<b>Output Accuracy</b>	4-20 mA dc (source) ± 5%
<b>Dynamic Signal Output</b>	Buffered input signal at BNC (5m or 16ft) and terminal block (300m or 1000ft)
<b>Vibration Range</b>	See "Ordering Option D"
<b>Maximum Load Resistance</b>	600 Ω
<b>Frequency Response</b>	2 Hz to 2 kHz for velocity 2 Hz to 5 kHz for proximity 2 Hz to 10 kHz for acceleration
<b>Sensor Malfunction</b>	Output current driven below 3.6 mA and sensor status green LED turns to red when sensor/cable not OK
<b>Filters</b>	Optional low-pass and high-pass filters (36 db/octave). Filter section does not affect dynamic signal. See "Ordering Option E & F"
<b>Vibration Indicator</b>	4-digit LCD display of vibration level
<b>Temperature Limits</b>	5580: -40° C to +85° C (-40° F to +185° F) SW5580: -40° C to +65° C (-40° F to +149° F)
<b>Input Power</b>	20 to 30 Vdc. Reverse polarity and electrical transient protection provided
<b>Hazardous Area Certification</b>	Available safety certification for CSA & NRTL/C Class I (A, B, C & D) T4, Div. 2. ATEX/IECEX/UKCA See "Ordering Option H"
<b>Electromagnetic Compatibility</b>	Yes
<b>Solid State Switches</b>	100 mA, SPST, 120 VAC or 24 VDC
<b>Electro-Mechanical Relays</b>	SPDT 5A 240/120 VAC, resistive load 5A 24 VDC, resistive load

# 5580 Smart Signal Conditioner & SW5580 Dual Channel Configurable Switch

Datasheet

## 5580 WIRING CONNECTIONS

PIN	Channel 1		Channel 2	
1	4-20mA +		4-20mA +	
2	4-20mA -		4-20mA -	
3	Raw signal out +		Raw signal out +	
4	Raw signal out -		Raw signal out -	
5	NC	PS	NC	PS
6	A/V +	PC	A/V +	PC
7	A/V -	PP	A/V -	PP
8	+	+24VDC	NC	
9	-		NC	

A/V – Accelerometer/Velocity Sensor  
 PS – Proximity Signal  
 PC – Proximity Common  
 PP – Proximity Power  
 NC – No Connection  
 Reset – For Latching Alarms  
 N.C. - Normally Closed  
 N.O. - Normally Open

## SW5580 WIRING CONNECTIONS

PIN	Channel 1		Channel 2	
1	4-20mA +		4-20mA +	
2	4-20mA -		4-20mA -	
3	Raw signal out +		Raw signal out +	
4	Raw signal out -		Raw signal out -	
5	NC	PS	NC	PS
6	A/V +	PC	A/V +	PC
7	A/V -	PP	A/V -	PP
8	+	+24VDC	+	Reset
9	-		-	
	<b>Dry Contacts</b>	<b>Solid State</b>	<b>Dry Contacts</b>	<b>Solid State</b>
10	Alert N.O.	Alert +	Alert N.O.	Alert +
11	Alert N.C.	Not Used	Alert N.C.	Not Used
12	Alert Common	Alert -	Alert Common	Alert -
13	Danger N.O.	Danger +	Danger N.O.	Danger +
14	Danger N.C.	Not Used	Danger N.C.	Not Used
15	Danger Common	Danger Common	Danger Common	Danger Common

## POSSIBLE MEASUREMENTS

- Shaft-relative radial vibration
- Shaft axial position (Thrust Measurements)
- Casing vibration (radial or axial)
- Shaft rotative speed
- Reciprocating compressor rod drop
- Reciprocating compressor rod position
- Reciprocating compressor crosshead acceleration
- Reciprocating machine impact measurements
- Reciprocating compressor frame vibration
- Dual Path measurements (two channel mode only)
  - One accelerometer input may generate an accelerometer output and an integrated velocity output
  - One accelerometer input may generate an accelerometer output and an impact output
  - One velocity input may generate a vibration output and an integrated position output
  - One proximity input may generate a position output (gap) and a vibration output
- Dual Channel measurements (two channel mode only)
  - Two acceleration inputs generates two acceleration outputs
  - Two acceleration inputs generates two impact outputs
  - One acceleration and one velocity input generates one acceleration and one velocity output
  - Two velocity inputs generates two velocity outputs
  - One velocity input and one proximity input generates one velocity and one proximity output (proximity output can be vibration, position or speed)

## ELECTROMAGNETIC COMPATABILITY (EMC)

### EMC TEST REPORT (FULL COMPLIANCE)

Report Number: 104414010DAL-001 Project Number: G104414010

Report Issue Date: August 20, 2020

5580 Smart Vibration Signal Conditioner  
SW5580 Dual Channel Configurable Switch

### Standards:

CISPR 11:2009Ed.5+A1

Industrial, Scientific and Medical Equipment – Radio Frequency Disturbance Characteristics - Limits and Methods of Measurement

IEC 61000-4-4 Ed. 2.1:2011

Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test

IEC 61000-4-6 Ed.3: 2008

Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields

# 5580 Smart Signal Conditioner & SW5580 Dual Channel Configurable Switch

Datasheet

## ORDERING INFORMATION

5580 Smart Signal Conditioner			
Channel 1			
5580-A-B-CCCC-D-E-FFFF-GG-H - B-CCCC-D-E-FFFF-GG			
5580-□-□-□□□□-□-□-□□□□-□□-□ - □-□□□□-□-□-□□□□-□□			
Channel 2			
5580-A-B-CCCC-D-E-FFFF-GG-H - B-CCCC-D-E-FFFF-GG			
5580-□-□-□□□□-□-□-□□□□-□□-□ - □-□□□□-□-□-□□□□-□□			
SW5580 Dual Channel Configurable Switch			
Channel 1			
SW5580-A-B-CCCC-D-E-FFFF-GG-H-J - B-CCCC-D-E-FFFF-GG			
SW5580-□-□-□□□□-□-□-□□□□-□□-□ - □-□□□□-□-□-□□□□-□□			
A	Channel Configuration		
1	Channel 1 Only <sup>1</sup>		
2	Channel 1 and Channel 2 <sup>2</sup>		
3	Enable Channel 2 On Site <sup>3</sup>		
B	Input Signal Type		
1	Velocity Sensor		
2	Accelerometer		
3	Proximity Probe System		
CCCC	Full Scale Range		
CCCC (If B=1)	Sensor Input Type/ Mounting Style/ Range Code		
Input Velocity Sensor Type	Vibration Range (4-20 mA Output)	Output Measure	
Electro-Mechanical Velocity Sensor	Piezoelectric Velocity Sensor		
1 0 2 V	5 0 2 V	0 - 1.0 ips, pk	Velocity/ English System
1 3 2 V	5 3 2 V	0 - 1.0 ips, rms	
1 0 3 V	5 0 3 V	0 - 2.0 ips, pk	
1 3 3 V	5 3 3 V	0 - 2.0 ips, rms	
1 0 5 V	5 0 5 V	0 - 10 mils, pk-pk	Integrated Displacement/ English System
1 0 6 V	5 0 6 V	0 - 20 mils, pk-pk	
3 0 2 V	7 0 2 V	0 - 20 mm/s, pk	Velocity/ Metric System
3 3 2 V	7 3 2 V	0 - 20 mm/s, rms	
3 0 3 V	7 0 3 V	0 - 50 mm/s, pk	
3 3 3 V	7 3 3 V	0 - 50 mm/s, rms	
3 0 5 V	7 0 5 V	0 - 200 μm, pk-pk	Integrated Displacement/ Metric System
3 0 6 V	7 0 6 V	0 - 500 μm, pk-pk	
		1 mm/s = 0.03937 ips 1 ips = 25.4 mm/s 1 mil = 25.4 μm 1 μm = 0.03937 mil	

**NOTES:**

1. If only channel configuration "1" is entered in the order, channel 2 will be disabled by manufacturer, but can be enabled from the configuration software with additional fee.
2. If channel configuration "2" is entered in the order, both channel 2 will be enabled by manufacturer.
3. Channel configuration "3" cannot be ordered without channel configuration "1" having been ordered first. With an additional fee, Metrix will ship a pass-code. User can enable channel 2 from the configuration software.

CCCC (If B=2)				Sensor Input Type/ Mounting Style/ Range Code	
Accel sensor (Input)				Vibration Range (4-20 mA Output)	
DIN rail				Output Measure/ Unit System	
1	0	2	A	0 - 10 g, pk	Acceleration/ English System
1	3	2	A	0 - 10 g, rms	
1	0	7	A	0 - 50 g, pk	
1	3	7	A	0 - 50 g, rms	
1	0	5	A	0 - 1.0 ips, pk	Integrated Velocity/ English System
1	3	5	A	0 - 1.0 ips, rms	
1	0	6	A	0 - 2.0 ips, pk	
1	3	6	A	0 - 2.0 ips, rms	
3	0	2	A	0 - 100 m/s <sup>2</sup> , pk	Acceleration/ Metric System
3	3	2	A	0 - 100 m/s <sup>2</sup> , rms	
3	0	7	A	0 - 500 m/s <sup>2</sup> , pk	
3	3	7	A	0 - 500 m/s <sup>2</sup> , rms	
3	0	5	A	0 - 20 mm/s, pk	Integrated Velocity/ Metric System
3	3	5	A	0 - 20 mm/s, rms	
3	0	6	A	0 - 50 mm/s, pk	
3	3	6	A	0 - 50 mm/s, rms	
CCCC (IF B=3)				Proximity Probe System Type	
0	0	2	P	4 mils, pk-pk (Vibration)	
0	0	3	P	5 mils, pk-pk (Vibration)	
0	0	4	P	6 mils, pk-pk (Vibration)	
0	0	5	P	10 mils, pk-pk (Vibration)	
0	0	6	P	15 mils, pk-pk (Vibration)	
0	0	7	P	20 mils, pk-pk (Vibration)	
0	0	8	P	30 mils, pk-pk (Vibration)	
0	0	9	P	40 mils, pk-pk (Vibration)	
0	2	1	P	100 μm, pk-pk (Vibration)	
0	2	2	P	150 μm, pk-pk (Vibration)	
0	2	3	P	200 μm, pk-pk (Vibration)	
0	2	4	P	250 μm, pk-pk (Vibration)	
0	2	5	P	300 μm, pk-pk (Vibration)	
0	2	6	P	400 μm, pk-pk (Vibration)	
0	2	7	P	500 μm, pk-pk (Vibration)	
0	2	8	P	750 μm, pk-pk (Vibration)	
0	2	9	P	1000 μm, pk-pk (Vibration)	
0	5	0	P	30-70 mils, avg gap (Position)	
0	5	1	P	20-80 mils, avg gap (Position)	
0	5	2	P	10-90 mils, avg gap (Position)	



# 5580 Smart Signal Conditioner & SW5580 Dual Channel Configurable Switch

Datasheet

CCCC (IF B=3)				Proximity Probe System Type Continued	
0	5	3	P	10-50 mils, avg gap (Position)	
0	5	4	P	20-70 mils, avg gap (Position)	
0	5	5	P	10-60 mils, avg gap (Position)	
0	5	7	P	20-160 mils, avg gap (Position)	
0	5	8	P	20-180 mils, avg gap (Position)	
0	7	0	P	750-1750 $\mu\text{m}$ , avg gap (Position)	
0	7	1	P	500-2000 $\mu\text{m}$ , avg gap (Position)	
0	7	2	P	250-2250 $\mu\text{m}$ , avg gap (Position)	
0	7	3	P	250-1250 $\mu\text{m}$ , avg gap (Position)	
0	7	4	P	500-1750 $\mu\text{m}$ , avg gap (Position)	
0	7	5	P	250-1500 $\mu\text{m}$ , avg gap (Position)	
0	7	7	P	500-4000 $\mu\text{m}$ , avg gap (Position)	
0	7	8	P	500-4500 $\mu\text{m}$ , avg gap (Position)	
5	0	1	P	500 RPM (Speed)	
2	0	2	P	2000 RPM (Speed)	Events Per Rev.
3	6	2	P	3600 RPM (Speed)	1-99 (All)
4	0	2	P	4000 RPM (Speed)	1-95
5	0	2	P	5000 RPM (Speed)	1-52
6	0	2	P	6000 RPM (Speed)	1-47
7	5	2	P	7500 RPM (Speed)	1-38
1	0	3	P	10000 RPM (Speed)	1-31
1	5	3	P	15000 RPM (Speed)	1-25
5	0	3	P	50000 RPM (Speed)	1-19
6	0	3	P	60000 RPM (Speed)	1-12
7	5	3	P	75000 RPM (Speed)	1-3
1	0	4	P	100000 RPM (Speed)	1-3
CCCC (IF B=2)				Impact Measurement Type <sup>4</sup>	
0	0	1	I	Low, <500 RPM and <500mV Baseline	
0	0	2	I	Medium, 500-1000 RPM and <500mV Baseline	
0	0	3	I	High, >1000 RPM or >500mV Baseline	

**NOTES:**

- The Impact Measurement must have an 100mV/g Accelerometer input.
- Standard is E=0; Filters affect 4-20 mA output but have no effect on dynamic output. For the impact measurement type filters must be D=0 and E=0.

**Ordering Example: 5580-1-2-102A-00-025A-0**

Channel 1, Accelerometer input, DIN-rail with 0-10 g, pk range, no filter, 25 mV/g sensor input, no hazard area certification.

**Ordering Example: SW5580-1-2-102A-00-025A-0-2**

Channel 1, Accelerometer input, DIN-rail with 0-10 g, pk range, no filter, 25 mV/g sensor input, no hazard area certification, and electromechanical relays.

D	High-Pass Filter <sup>5</sup>				
0	No filter				
1	N/A (Accel) or 5 Hz (Velocity or Proximity)				
2	N/A (Accel) or 10 Hz (Velocity or Proximity)				
3	N/A (Accel) or 20 Hz (Velocity or Proximity)				
4	50 Hz				
5	100 Hz				
6	200 Hz				
7	500 Hz				
8	1 kHz				
9	2 kHz				
E	Low-Pass Filter <sup>5</sup>				
0	No filter				
1	20 Hz				
2	50 Hz				
3	100 Hz				
4	200 Hz				
5	500 Hz				
6	1 kHz				
7	2 kHz				
8	N/A (Vel) or 5 kHz (Acceleration or Proximity)				
9	N/A (Velocity or Proximity) or 10 kHz (Accel)				
FFFF (If B=1)			Sensor Input in mV/ips (mV/mm/s)		
1	0	0	V	100 mV/ips (3.9 mV/mm/s)	SV6300A recommended
1	0	5	V	105 mV/ips (4.1 mV/mm/s)	5485C recommended
1	4	5	V	145 mV/ips (5.7mV/mm/s)	
1	5	0	V	150 mV/ips (5.9 mV/mm/s)	
2	0	0	V	200 mV/ips (7.9 mV/mm/s)	
5	0	0	V	500 mV/ips (19.7 mV/mm/s)	
FFFF (If B=2)			Sensor Input in mV/g (mV/mm/s <sup>2</sup> )		
0	1	0	A	10 mV/g (1 mV/m/s <sup>2</sup> )	
0	2	5	A	25 mV/g (2.55 mV/m/s <sup>2</sup> )	
0	5	0	A	50 mV/g (5.10 mV/m/s <sup>2</sup> )	
1	0	0	A	100 mV/g (10.20 mV/m/s <sup>2</sup> )	
FFFF (If B=3)			Driver Output in mV/mil (mV/ $\mu\text{m}$ )		
1	0	0	P	100mV/mil (3.937 mV/ $\mu\text{m}$ )	
2	0	0	P	200mV/mil (7.87 mV/ $\mu\text{m}$ )	



# 5580 Smart Signal Conditioner & SW5580 Dual Channel Configurable Switch

Datasheet

GG		Pulses per Revolution
0	0	N/A (for vibration or position), Accelerometer or Velocity Input
X	X	XX=Number of pulses per revolution (events per revolution), valid entries are two digit numbers from 01-99, with a maximum value of RPM x # of events ≤ 190,000. These two digits are relevant to proximity speed mode only.
H		Hazardous Area Certification
0		Ordinary Location Approval (Non-Hazardous Area Approval)
5		Multiple Hazardous Area Approvals <sup>6,7</sup>
J		Relay Circuit Output <sup>8</sup>
1		Solid-state switch (SPST, 100 mA, 120 VAC or 24 VDC)
2		Electromechanical relay (SPDT, 5A 240/120 VAC resistive load, or 5A 24 VDC resistive load)

**NOTES:**

6. When connected & wired w/approved Metrix sensor. Request Application Wiring Drawing 1874437 for details. If sensors are rated for Class I Div 1 or Zone 0 or 1 as long as the 5580/SW5580 remains in an approved area with barriers this is allowed.

7. ETL, ATEX, IECEx, hazardous area approvals. See page 8 for details.

8. Relays are set at 25% and 50% of the full scale range.

## IMPACT MEASUREMENT

The impact measurement uses an accelerometer input and outputs a 4-20 mA signal proportional to the number of impact events over the threshold in a set time period. The relationship between the mA signal and the number of impact events remains the same. The time frame (reset time) over which the events are measured can be changed using the 5580/SW5580 software. This allows you to match the measuring time frame with the RPM range of your equipment. Chart #1 indicates mA output vs. impact events over the set threshold.

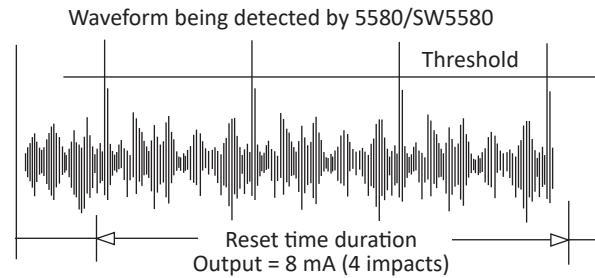








CHART 1	
Severity Level	Output
16 impacts > threshold	20 mA
14 impacts > threshold	18 mA
12 impacts > threshold	16 mA
10 impacts > threshold	14 mA
8 impacts > threshold	12 mA
6 impacts > threshold	10 mA
4 impacts > threshold	8 mA
2 impacts > threshold	6 mA
No impacts > threshold	4 mA
Loss of Power	0 mA

Translates number of impact events into 4-20 mA signal

## HAZARDOUS AREA APPROVALS

AREA	5580	SW5580
North America	CLASS I, DIVISION 2, GROUPS A, B, C & D, CLASS I, ZONE 2, AEx ec nC IIC T4 Gc -40°C ≤ Ta ≤ +85°C ETL20CA104377470X Increased Safety 	CLASS I, DIVISION 2, GROUPS A, B, C & D, CLASS I, ZONE 2, AEx ec nC IIC T4 Gc -40°C ≤ Ta ≤ +65°C ETL20CA104377470X Increased Safety 
International ATEX/IECEX/UKEX	 Ex ec nC IIC T4 Gc -40°C ≤ Ta ≤ +85°C ITS-I21ATEX30380X IECEX ETL 21.0036X ITS21UKEX0213X Increased Safety 	 Ex ec nC IIC T4 Gc -40°C ≤ Ta ≤ +65°C ITS-I21ATEX30380X IECEX ETL 21.0036X ITS21UKEX0213X Increased Safety 

**Note:** Metrix is continuously improving our products. Please refer to our website to download the latest version of this datasheet.